


THE LIGHT OPERATOR FOR MODERNIZATION

# Piuma PLUS 300



## PiumaPLUS, the light operator

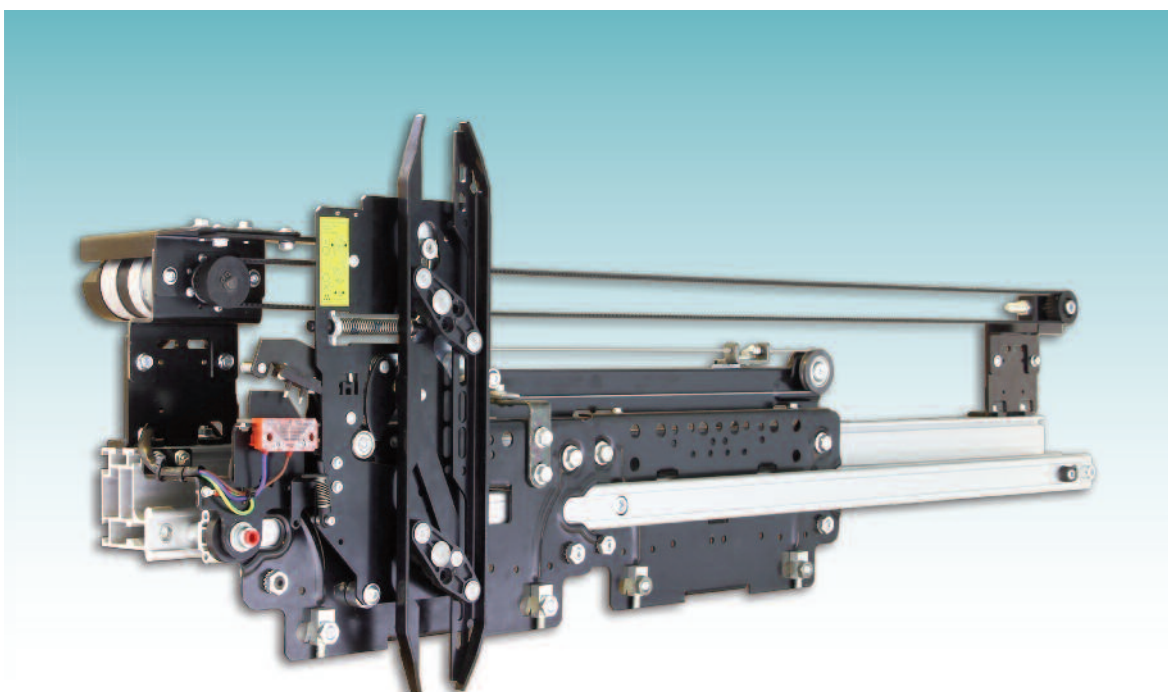







Ideal for modernization and elevator platform with weight or dimensions constraints

- Aluminum frame with reduced weight and overall dimensions
- ECO+ energy efficient and compact brushless drive installed in horizontal position to reduce height requirements
- Easy and fast installation and speed adjustment
- 127/230 V 50/60 Hz with high tolerance, 24 Volt available
- Closing force adjustment
- Self-learning function
- Speed settings according to disabled people rules
- Direct connection and management of light barrier detector

THE LIGHT OPERATOR FOR MODERNIZATION

# Piuma PLUS 300

## PRODUCTION RANGE

POS.	SERIES	TYPE	CAR DOORS ILLUSTRATION	C.O. mm		L.H. mm	
				Min.	Max.	Min.	Max.
TOPDRIVEN MECHANISM	3201	02/C		600	900		
		12/R		600	900		
		12/L					
		33/R		600	900	2000	2200
		33/L					
		35/R		700	900		
		35/L		700	900		
		44/C 45/C		600	900		

## WEIGHT TABLE - PIUMA TY 12/R-L

CO (mm)	EFFECTIVE WEIGHT (kg)	NOT CLADDING PANELS TOTAL WEIGHT + SILL (kg)	CLADDING PANELS TOTAL WEIGHT + SILL (kg)
600	20,5	47	59
650	20,7	49	61
700	20,9	51	63
750	21,1	53	65
800	21,6	55	67
850	21,8	57	69
900	22	59	71