

Please send this order form to  
[orders.wed@wittur.com](mailto:orders.wed@wittur.com)

## General data

Contact name: ..... e-Mail: .....

Project: ..... Client company: .....

Quantity: ..... Delivery date: .....  
(With specifications given below.) (Delivery of **Standard** configurations in 6 weeks exw.)

Order number: ..... Remarks: .....

Delivery address: .....



## Motor options

☒ Overall length ☐ WSG-S3.4 (900Nm) ☐ WSG-S3.5 (1,200Nm) ☐ WSG-S3.6 (1,650Nm)


☒ UL/CSA certification: ☐ **Standard = without** ☐ UL/CSA approved

☒ Suspension / Traction sheave: ☐ 2:1 ☐ 1:1  
☐ 400 mm = **Standard** ☐ 320 mm ☐ 480 mm ☐ 520 mm

☒ Rated speed: ☐ 0.5ms ☐ 0.63ms ☐ 1.0ms ☐ 1.25ms ☐ 1.6ms  
☐ 1.75ms ☐ 2.0ms ☐ 3.0ms ☐ 3.5ms  
(No standard needed.)

☒ Painting: ☐ **Standard = RAL 5018** ☐ .....

☒ Electr. connection: ☐ **Standard = Terminal box**  
(2 overexcitation rectifiers inside the terminal box)



☐ 2 overexcitation rectifiers will be delivered separately

☒ Encoder system ☐ **Standard = Sendix 8.5873 - Biss-C - 10m-cable with open wire ends**

☐ ECN 413 - **EnDat** ☐ ECN 413 - **SSI** ☐ ERN 487

☐ Electronic Nameplate (ENP) for CT unidrive SP and ECN 413-EnDat

(Order with ECN 413 EnDat is not influencing delivery time!)

☐ ... Please mark the relevant boxes.

page 1 of 4


WSG-S3\_order-form\_EN / DS.8.003306 / 09.08.2017

## Traction sheave - Groove profile

Please send this order form to  
[orders.wed@wittur.com](mailto:orders.wed@wittur.com)




☒ Standard

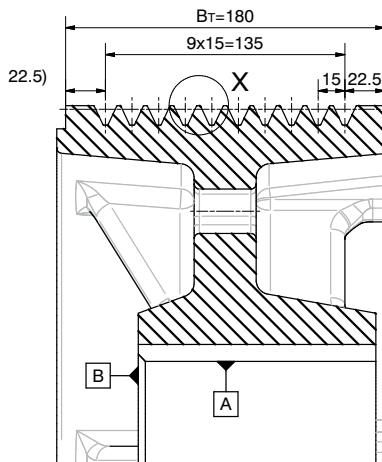


Keilrille  
10x10 / K50° HRC55 / 15 // 180

X5X6X7  
**40A**

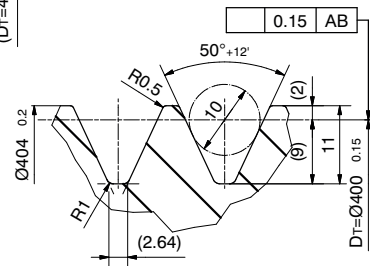


☐

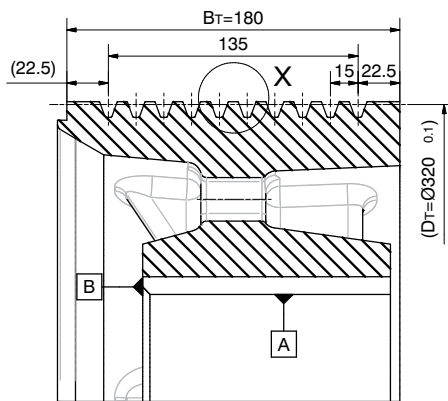

Keilrille  
10x8 / K40° HRC55 / 15 // 180

X5X6X7  
**32A**

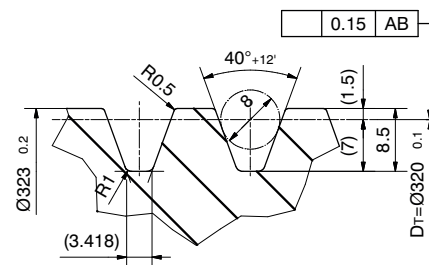

☐ another type

☐ ... Please mark the relevant boxes.

page 2 of 4

WSG-s3\_order-form\_EN / DS.8.003306 / 09.08.2017


## Accessories

Please send this order form to  
[orders.wed@wittur.com](mailto:orders.wed@wittur.com)


☒ **BRAKE MANUAL RELEASE** ☐ without = **Standard**

☐ **remotely controlled** (for Bowden cable)

Brake with or without manual release as specified with the order.  
No possibility for retrofit.



☐ **with lever block and 3 m Bowden cable**



☐ **for machine room**



☒ **RETURN MOTION DEVICE** ☐ without = **Standard**

☐ **with**




☒ **MOTOR CABLE SET** ☐ without = **Standard**

☐ **with**

Motor cable length: ☐ 5 m  
☐ 7 m  
☐ 10 m

Brake cable length: ☐ 5 m  
☐ 7 m  
☐ 10 m  
☐ 15 m  
☐ 20 m  
☐ 30 m

☐ halogen free

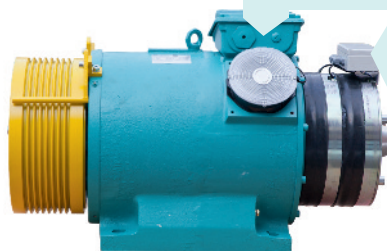

**Motor cable** standard: 503 957 A21-xx  
halogen-free: 509 322 A21-xx  
**Temp. sensor cable** standard: 503 957 A21-xx-1  
halogen-free: 509 322 A21-xx-1  
**Fan cable** standard: 503 957 A21-xx-2  
halogen-free: 509 322 A21-xx-2

**Brake cable (magnet)** standard: 503 958 011-xx  
halogen-free: 509 323 011-xx  
**Brake cable (monitoring)** standard: 503 958 011-xx-1  
halogen-free: 509 323 011-xx-1

with:

A = 2 ... cable cross section 4 x 2,5 mm<sup>2</sup> (for I<sub>S3-40%</sub> < 36 A)  
A = 4 ... cable cross section 4 x 4 mm<sup>2</sup> (for I<sub>S3-40%</sub> < 47 A)  
A = 6 ... cable cross section 4 x 6 mm<sup>2</sup> (for I<sub>S3-40%</sub> < 60 A)  
A = 9 ... cable cross section 4 x 10 mm<sup>2</sup> (for I<sub>S3-40%</sub> < 84 A)  
A = E ... cable cross section 4 x 16 mm<sup>2</sup> (for I<sub>S3-40%</sub> < 113 A)  
xx ... cable length

☐ ... Please mark the relevant boxes.

page 3 of 4

WSG-s3\_order-form\_EN / DS.8.003306 / 09.08.2017

## MEASUREMENT SYSTEM CONNECTOR

(for Sendix 8.5873)

☐ without =  
**Standard** open wire ends



☐ for inverter D-Pack



☐ for inverter KEB F5



Please send this order form to  
[orders.wed@wittur.com](mailto:orders.wed@wittur.com)









## MEASUREMENT CABLE

(for ECN 413 and ERN 487)

☐ without =  
**Standard**

☐ with- Cable length:

- ☐ 5 m
- ☐ 7 m
- ☐ 10 m
- ☐ 15 m
- ☐ 20 m

Measurement cable type	Inverter type	recommended encoder system	recommended measurement system cable
<input type="checkbox"/> 	E-Pack Arkel ARCODE	ECN 413 (EnDat or SSI)	503 325 021 xx
<input type="checkbox"/> 	D-Pack Arkel ADrive CT unidrive SP	ECN 413 (EnDat or SSI)	502 452 021 xx
<input type="checkbox"/> 	Fuji Frenic	ECN 413 (EnDat)	502 679 022 xx
<input type="checkbox"/> 	RST Elektronik FRC	ECN 413 (EnDat)	508 752 022 xx
<input type="checkbox"/> 	GEFRAN (SIEI) AVY-L-M	ERN 487	503 499 022 xx
<input type="checkbox"/> 	Vacon NXP	ECN 413 (EnDat)	503 289 021 xx
<input type="checkbox"/> 	Yaskawa/ Omron L7 Telemecanique/ Schneider Altivar 71	ECN 413 (EnDat)	503 715 022 xx
<input type="checkbox"/> 	Ziehl-Abegg 2SY/3BF	ECN 413 (EnDat or SSI)	508 749 022 xx

xx... cable length [m]

☐ ... Please mark the relevant boxes.

page 4 of 4

WSG-s3\_order-form\_EN / DS.8.003306 / 09.08.2017