

Please send this order form to  
[orders.wed@wittur.com](mailto:orders.wed@wittur.com)

## General data

Contact name: ..... e-Mail: .....

Project: ..... Client company: .....





Quantity: ..... Delivery date: .....  
(With specifications given below.) (Delivery of **Standard** configurations in 4 weeks exw.)

Order number: ..... Remarks: .....

Delivery address: .....



## Motor options

<input checked="" type="checkbox"/> Overall length	<input type="checkbox"/> WSG-S1.2 (170Nm)	<input type="checkbox"/> WSG-S1.3 (230Nm)
<input checked="" type="checkbox"/> Supply voltage:	<input checked="" type="checkbox"/> <b>Standard = 400 V AC</b>	<input type="checkbox"/> 230 V AC
<input checked="" type="checkbox"/> Suspension / Traction sheave:	<input type="checkbox"/> 2:1	<input type="checkbox"/> 1:1
	<input checked="" type="checkbox"/> <b>240 mm = Standard</b>	<input type="checkbox"/> 160 mm
		<input type="checkbox"/> 210 mm
		<input type="checkbox"/> 320 mm
		<input type="checkbox"/> 400 mm
<input checked="" type="checkbox"/> Rated speed:	<input type="checkbox"/> 0.5 ms	<input type="checkbox"/> 0.63 ms
	<input type="checkbox"/> 1,0 ms	<input type="checkbox"/> 1.6 ms
	<input type="checkbox"/> 1.75 ms	
<input checked="" type="checkbox"/> Painting:	<input checked="" type="checkbox"/> <b>Standard = RAL 5018</b>	<input type="checkbox"/> .....
<input checked="" type="checkbox"/> Electr. connection:	<input checked="" type="checkbox"/> <b>Standard = Terminal box</b> (2 overexcitation rectifiers inside the terminal box)	<input type="checkbox"/> Connectors (2 overexcitation rectifiers will be delivered separately.)
	<input type="checkbox"/> Cable (5 m) (2 overexcitation rectifiers will be delivered separately.)	
		
	<input type="checkbox"/> 2 overexcitation rectifiers will be delivered separately	<input type="checkbox"/> other cable length ..... m
<input checked="" type="checkbox"/> Rope guards:	<input checked="" type="checkbox"/> <b>Standard</b>	<input type="checkbox"/> Top Guard
		
		<input type="checkbox"/> Multi roof
	(only for DT = 240 mm)	(only for DT = 240 mm)
<input checked="" type="checkbox"/> Encoder system	<input checked="" type="checkbox"/> <b>Standard = Sendix 8.5873 - Biss-C - 10 m-cable with open wire ends</b>	
	<input type="checkbox"/> ECN 413 - <b>EnDat</b>	<input type="checkbox"/> ECN 413 - <b>SSI</b>
	<input type="checkbox"/> ERN 487	
	<input type="checkbox"/> Electronic Nameplate (ENP) for CT unidrive SP and ECN 413-EnDat	

(Order with ECN 413 EnDat is not influencing delivery time!)

☐ ... Please mark the relevant boxes.

page 1 of 4

WSG-S1\_Order-form\_EN / DS.8.003310 / 08.08.2017

## Traction sheave - Groove profile

Please send this order form to  
orders.wed@wittur.com



<input checked="" type="checkbox"/> Standard	<p><b>4L1</b> X5X6X7 Keilrille 8x6,5/K45°HRC55/11/92 45° Øds=6,5 D<sub>T</sub> = Ø 240</p>	<p><b>24E</b> X5X6X7 Keilrille 4x6,7/K60°HRC55/11/92 60° Øds=6,7 D<sub>T</sub> = Ø 240</p>
<input type="checkbox"/>	<p><b>4L2</b> X5X6X7 Keilrille 8x6,5/K40°HRC55/11/92 40° Øds=6,5 D<sub>T</sub> = Ø 240</p>	<p><b>24F</b> X5X6X7 Keilrille 8x6,7/K60°HRC55/11/92 60° Øds=6,7 D<sub>T</sub> = Ø 240</p>
<input type="checkbox"/>	<p><b>24C</b> X5 X6 X7 6x6,5/K45°HRC55/11/92 45° Øds=6,5 D<sub>T</sub> = Ø 240</p>	<input type="checkbox"/> another type
<input type="checkbox"/>	<p><b>24D</b> X5X6X7 Keilrille 7x6,5/K40°HRC55/11/92 40° Øds=6,5 D<sub>T</sub> = Ø 240</p>	<input type="checkbox"/> another type

☐ ... Please mark the relevant boxes.

page 2 of 4

WSG-ST\_order-form\_EN / DS.8.003310 / 08.08.2017


## Accessories

Please send this order form to  
**orders.wed@wittur.com**


☒ **BRAKE MANUAL RELEASE** ☐ without = **Standard**

☐ **remotely controlled**  
(lever support and 3 m Bowden cable included)

☐ unmounted, separately delivered

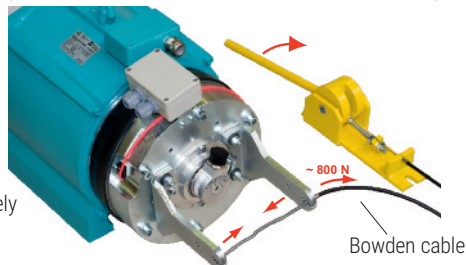

☐ **for machine room**



☒ **MOTOR CABLE SET** ☐ without = **Standard**


☐ with

Motor cable length: ☐ 5 m  
☐ 7 m  
☐ 10 m

Brake cable length: ☐ 5 m  
☐ 7 m  
☐ 10 m  
☐ 15 m  
☐ 20 m  
☐ 30 m

Motor cable ☐ Connector  
set type

☐ halogen free



**Motor cable** standard: 503 120 A21-xx  
halogen-free: 508 828 A21-xx



Pin	Wire
1 (U1)	No.1 / U1
4 (V1)	No.2 / V1
3 (W1)	No.3 / W1
PE	green/yellow
C (T1)	No.5 / BR1
D (T2)	No.6 / BR2


**Brake cable** standard: 503 121 011-xx  
halogen-free: 508 829 011-xx




Pin	Wire
1	No.1
2	No.2
3	No.3
PE	green/yellow
A	No.4
B	No.5
C	No.6
D	No.7
E	No.8

☐ **Terminal box**


☐ halogen free



**Motor cable** standard: 503 458 A21-xx  
halogen-free: 514 073 A21-xx



**Brake cable set** standard: 503 459 011-xx  
halogen-free: 514 074 011-xx



☐ ... Please mark the relevant boxes.

page 3 of 4

WSG-ST\_order-form\_EN / DS.8.003310 / 08.08.2017

## MEASUREMENT SYSTEM CONNECTOR

(for Sendix 8.5873)

☐ without =  
**Standard** open wire ends



☐ for inverter D-Pack



☐ for inverter KEB F5



Please send this order form to  
[orders.wed@wittur.com](mailto:orders.wed@wittur.com)









## MEASUREMENT CABLE

(for ECN 413 and ERN 487)

☐ without =  
**Standard**

☐ with- Cable length:

- ☐ 5 m
- ☐ 7 m
- ☐ 10 m
- ☐ 15 m
- ☐ 20 m

Measurement cable type	Inverter type	recommended encoder system	recommended measurement system cable
<input type="checkbox"/> 	E-Pack Arkel ARCODE	ECN 413 (EnDat or SSI)	503 325 021 xx
<input type="checkbox"/> 	D-Pack Arkel ADrive CT unidrive SP	ECN 413 (EnDat or SSI)	502 452 021 xx
<input type="checkbox"/> 	Fuji Frenic	ECN 413 (EnDat)	502 679 022 xx
<input type="checkbox"/> 	RST Elektronik FRC	ECN 413 (EnDat)	508 752 022 xx
<input type="checkbox"/> 	GEFRAN (SIEI) AVY-L-M	ERN 487	503 499 022 xx
<input type="checkbox"/> 	Vacon NXP	ECN 413 (EnDat)	503 289 021 xx
<input type="checkbox"/> 	Yaskawa/ Omron L7 Telemecanique/ Schneider Altivar 71	ECN 413 (EnDat)	503 715 022 xx
<input type="checkbox"/> 	Ziehl-Abegg 2SY/3BF	ECN 413 (EnDat or SSI)	508 749 022 xx

xx... cable length [m]

☐ ... Please mark the relevant boxes.

page 4 of 4

WSG-ST\_Order-form\_EN / DS.8.003310 / 08.08.2017