

# WSG-TR • Order form




WITTUR

Please send this order form to  
**orders.wed@wittur.com**

## General data

Contact name: \_\_\_\_\_ e-Mail: \_\_\_\_\_  
Project: \_\_\_\_\_ Client company: \_\_\_\_\_  
Quantity: \_\_\_\_\_ Delivery date: \_\_\_\_\_  
Order numbers: \_\_\_\_\_ Remarks: \_\_\_\_\_  
Delivery address: \_\_\_\_\_



Download Operating Instructions



EN



DE

## Motor options

**Overall length** WSG-TR.J (140 Nm) WSG-TR.K (180 Nm) WSG-TR.L (240 Nm) WSG-TR.M (290 Nm)

**UL/CSA certification** **Standard = without** UL/CSA certified With UL/CSA approval the motors are called **WSU-TR.x**


**Suspension** 2:1 1:1

**Tract. sheave** 120 mm


**Rated speed** 0.5 m/s 0.63 m/s 1.0 m/s 1.6 m/s

**Painting** **Standard = RAL 5018** \_\_\_\_\_

**Electr. connection** **Standard = Connectors** (2 overexcitation rectifiers will be delivered separately)



**Rope guards** **Standard**



**Encoder system** **Standard = Sendix 8.5873 - Biss-C** (10m-cable with open wire ends)

ECN 1313 - **EnDat** ECN 1313 - **SSI** ERN 1387


another type

☐ ... Please mark the relevant boxes.

Page 1 of 4

of\_WSG-TR\_EN\_ed11Apr2025 / DS.8.003682

## Traction sheave - Groove profile
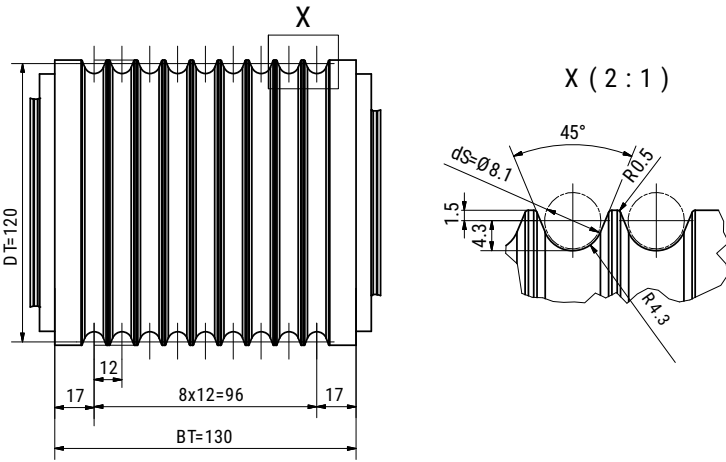
<p><b>Standard = 12A2</b></p>	
<p>another type</p>	

☐ ... Please mark the relevant boxes.

## Accessories

### Motor cable set

**Standard = without**

**with**

Cable halogen free

Brake cable length

5 m

7 m

10 m

15 m

20 m

Motor cable length

5 m

7 m

10 m


15 m

20 m




Cable cross section  
 (for motor power cable)

2.5 mm<sup>2</sup>




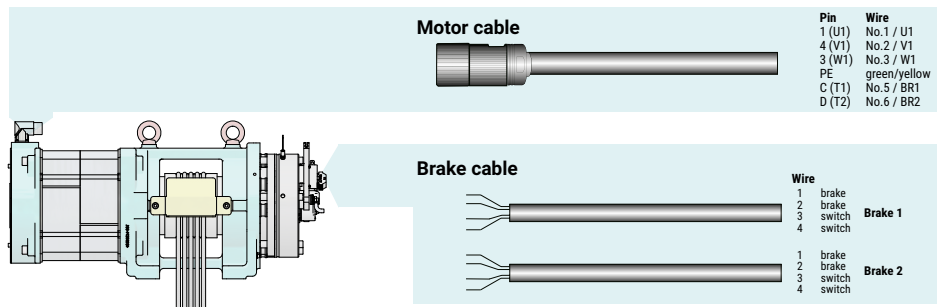





4.0 mm<sup>2</sup>



☐ ... Please mark the relevant boxes.

<b>Encoder connector</b>	<b>Standard = without</b>	open wire ends	
for Sendix 8.5873			
	for inverter F-Pack	(620 099)	
	for inverter D-Pack		

<b>Encoder cable</b>	<b>Standard = without</b>	with	
for ECN 1313 and ERN 1387		Encoder cable length	5 m 7 m 10 m 15 m 20 m

Encoder cable type	Inverter type	Recommended encoder system	Recommended encoder cable
	F-Pack (WLD) Danfoss	ECN 1313 (EnDat or SSI)	514 273 022 xx
	E-Pack Arkel ARCODE	ECN 1313 (EnDat or SSI)	503 325 021 xx
	D-Pack Arkel ADrive CT unidrive SP / E	ECN 1313 (EnDat or SSI)	502 452 021 xx
	Brunner & Fecher (FB xx)	ECN 1313 (EnDat)	640 007 022 xx
	Fuji Frenic	ECN 1313 (EnDat)	502 679 022 xx
	GEFRAN (SIEI) AVY-L-M	ERN1387	502 599 022 xx
	RST Elektronik FRC	ECN 1313 (EnDat)	508 752 022 xx
	Yaskawa/ Omron L7 Telemecanique/ Schneider Altivar 71	ECN 1313 (EnDat)	503 715 022 xx
	Ziehl-Abegg 4C	ECN 1313 (EnDat or SSI)	504 503 022 xx
another type			

<b>Packing</b>	<b>Standard = Special pallet for truck</b>	
	Special <b>wooden</b> box for truck	Wooden case for sea freight
	Fumigation certificate for wooden cases (IPPC)	

☐ ... Please mark the relevant boxes.