

AUTOMATIC CAR ROUND DOORS with mechanism in the bottom


3602



Code DS.2.003522.EN
Version E
Date 22.01.2025

Offer Request	Order
Customer	
Address	
Fax/Email	
Tel.	
Contact Person	

Date
Customer Reference
Customer Number
Destination Country
Request Delivery




- ◆ Radius of cabin on CO line (RC) _____
- ◆ Clear Opening (CO) _____
- ◆ Clear Height (CH) _____ (CH Std=2000)
- ◆ Thickness of cabin (SC) _____

IN ACCORDANCE WITH:


EN81-1/2
Chinese Standard (GB7588)

EN81-20/50 + EN81-1/2


SHEET METAL PANELS / FRAMED GLASS PANELS



Car entrance type "SP"




SC > 0

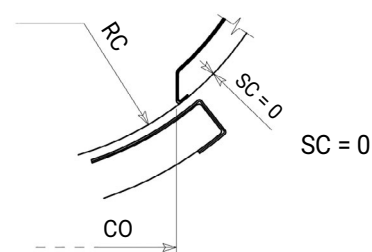


Car entrance type "SM"

GLASS PANELS WITH:




Car entrance type "SP"



SC > 0


Car entrance type "MP"






SC = 0

Car entrance type "SM"

SC (Visible trims) = - 45
SC (Hidden trims) = - 30



TYPE	DOOR TYPE (FROM LANDING SIDE)	QUANTITY
02/D		
72/DR	Right 	
72/DL	Left 	

COMPOSITION

Mechanism
Upper guide
Panels



AUTOMATIC CAR ROUND DOORS with mechanism in the bottom

3602

Code DS.2.003522.EN
Version E
Date 22.01.2025

UPPER GUIDE

Antirust + Finish RAL 9005 (black)

Cataphoresis + RAL 9005

Full inox

Aisi 304

Aisi 316

Other: specify _____

PANELS

Without panels

Single-skinned metal sheet panels

Double-skinned metal sheet panels

Glass framed

Full glass with:

Hidden trims

Visible trims

Visible bottom trims and hidden upper trims

Painting

Antirust

Other: specify _____

Cladding

Stainless Steel _____

Other: specify _____

MECHANISM

Belt Driven

Supra Drive

Mechanism characteristics

With coupler (std. solution)

With fix cam

Executions

With runby



Car door locking device

Can open

◆ Nr of door entrances

Single

Double

IP20 Standard

IP54 Waterproof

TOE-GUARD (cover of the mechanism)

Antirust + Finish RAL 9005 (black)

Cataphoresis + RAL 9005

Full inox

Aisi 304

Aisi 316

Other: specify _____

Rear cladding (landing side)

SILL

Standard in brushed
stainless stillStainless steel sill
electropainted

Other: specify _____

EXTRA SAFETY DEVICES

Prearrangement for installation detector type MEMCO 3D 770-0 40
(only for sheet metal panels and glass framed panels)Detector type MEMCO 3D 770-0 40 assembled
(only for sheet metal panels and glass framed panels)

Photocell to be fixed in sill

(only for glass panels) _____

Anti-trapping device with Hamlin contact
(only for framed and full galss panes!)

PACKING

Standard pallet

Seaway wooden crate

Wooden cage

ISPM15 Norm

NOTE

Order Revisions

Rev.	Date	Filled in By	Description
A			
B			
C			
D			
E			

Subject to change without notice!