

AUGUSTA ECO

CAR DOOR

THE IDEAL CHOICE FOR LOW DUTY APPLICATION




AUGUSTA ECO

CAR DOOR

THE IDEAL CHOICE FOR LOW DUTY APPLICATION


PRODUCT PARAMETERS & RANGE

Serie	3215
Type	02/C
Pos.	Door with Operator Above
Illustration	
Sill Depth	55 mm

CO _{mm}	700	800	900	1000
CH _{mm}	2100			

CO = Clear Opening
CH = Clear Height

* Suitable for Wittur AUGUSTA & CORE landing door

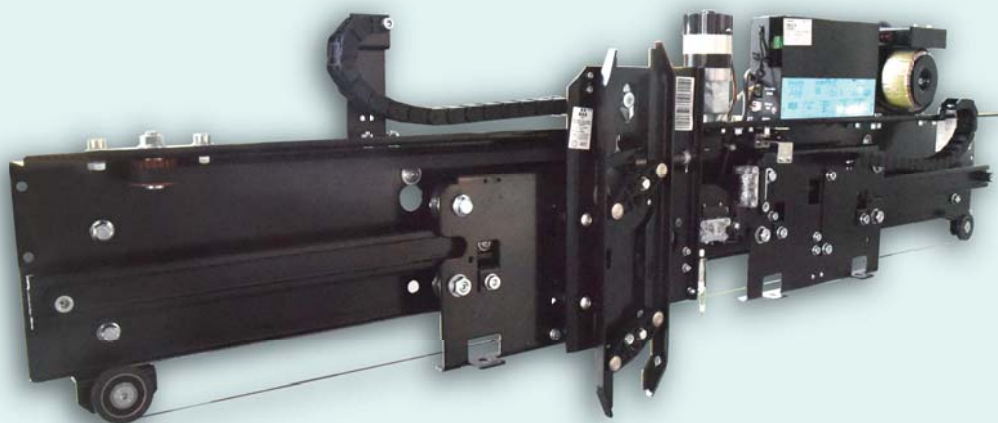

SAFETY AND RELIABLE

- The car door with car door lock and emergency device as standard, complies with requirements of the latest released EN81-20/50, and GB7588:2003+XG1:2016, more safety and reliability

COMPACT DESIGN

- Door operator matches with Wittur Augusta and Core mechanism. Compact structure design makes its system more stable.
- Toothed motor belt installed in a relatively compact space, which provide better protection against foreign objects into it.

LOW ENERGY CONSUMPTION

- Brushless motor, low energy consumption and easy to control.
- "0" consumption standby function

EASY INSTALLATION

- The compact and simple design concept of door drive part, make the weight of the door very light, easy for on-site installation and adjustment.